





# Ganz Genstar IP PTZ




Wallmount included

Technical specifications	ZN8-P5X40DL-H
Network Protocols	IPv4/IPv6, APR, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP, IGMP, SNMP
Auto-Tracking	Yes
VA	Perimeter, Single Virtual Fence, Double Virtual Fences, Loiter, Multi Loiter, Object Left, Object Removed, Abnormal Speed, Converse, Illegal Parking, Signal Bad
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player
Security	User security authentication, Reset, Hardware Watch Dog
Max. User	10
System Compatibility	Onvif
Ethernet	1x Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1x Audio In, 1x Audio Out
Audio Compression	G.711, RAW_PCM
Audio Bit Rate	8kbps (G.711), 16kps (RAW_PCM)
Alarm I/O	7x Alarm In, 2x Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes (Built-In)
Max. User	10
Edge Storage	NAS Local PC for instant recording Micro SD card 128GB
Power Supply	Standard DC12V / Hi-PoE
Power Consumption	<40W
Operating Temperature	Starting Temperature: -40 °C~ 60 °C Working Temperature: -55 °C ~ 60 °C
Operating Humidity	0% - 90% RH
Protection	IP66, TVS4000V
Certifications	CE / FCC
Casing	Metal
Dimensions	Ø226 × 362.8mm
Weight	5.2kg

# Ganz Genstar IP PTZ

## Dimensions

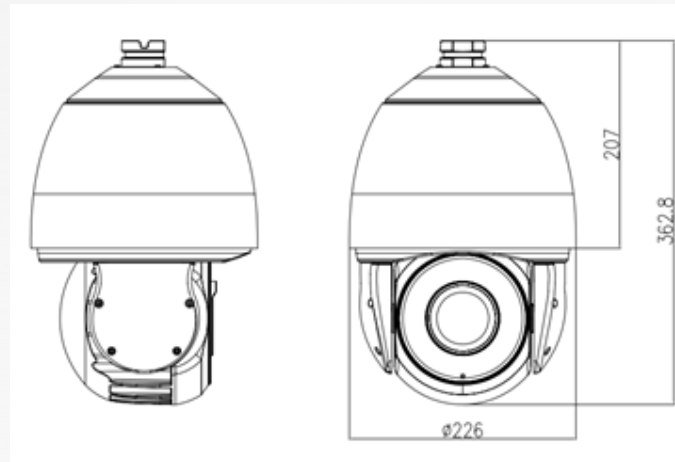

## Accessories

Wall Bracket



ZA8-CBK349

Ceiling Bracket



ZA8-CBK348

Corner Mount



ZA8-CBK605

Pole Mount



ZA8-CBK604B